



# INFORMATION & SPECIFICATIONS DATA SHEET

TEMPERATURE & PROCESS INSTRUMENTS INC

## Mp88800 Series Programmable 2-Wire 4 to 20mA DIN Rail Mounted Temperature Transmitter

### 2-Wire Programmable Microprocessor Based DIN Rail Mount Transmitter with Thermocouple, RTD, mV and Ohms Input

The Mp88800 Series is the industrys most advanced 2-wire DIN rail mounting microprocessor based temperature transmitter. Less than 23 mm (1") wide and mounting on standard DIN rails, it is easily programmed in the field to your exact requirements via an optional "Point N Click" PC based software.

The Mp88800 transmitters incorporate highly advanced mathematical functions to provide the highest accuracy in the industry - 0.1% of set span. It is scalable over the entire range of 9 RTDs and 12 Thermocouple Types; as well as accepting Millivolt and Resistance inputs. Features include: self-diagnostics, small minimum spans, complete isolation (500Vdc), selectable On/Off linearization; wide power supply capability (10 to 36Vdc); selectable upscale/downscale break protection.

You no longer have to stock several different transmitters when a single high accuracy programmable transmitter can meet all of your requirements. The Mp88800 transmitters can be factory configured or can easily be programmed in the field with the optional IF700 programming module and PC based "Point 'n Click" software program in less than one minute, the Mp88800 Series can be used for all your different sensor and range requirements.



### Features

- ▶ **MP88800 FM or ATEX Approvals Standard**
- ▶ Microprocessor-Based, HART® Protocol
- ▶ Universal Input Thermocouples, RTD, millivolts and Ohms
- ▶ Field Programmable with optional Programming Kit and PC Software
- ▶ Fully Linearized
- ▶ RFI/EMI-Immune
- ▶ High Accuracy 0.1%
- ▶ Small Size 0.89" x 2.92" x 3.9 (22.5 x 75 x 99mm)
- ▶ Fits on Standard DIN Rails
- ▶ Ideal for use in High Density Cabinet Applications



IF700 Programming Interface and PC Based Software



# INFORMATION & SPECIFICATIONS DATA SHEET

TEMPERATURE & PROCESS INSTRUMENTS INC

## Mp88800 DIN Rail Mounted Programmable Microprocessor Based Temperature Transmitter Specifications

### Specifications

**RTD Input:** Pt100, Pt250, Pt500, Pt1000, Ni100, Ni500, Ni1000, Cu10, Cu100

**Thermocouple Input Types:** K, J, L, T, U, E, R, S, B, C, D, N

**Other Inputs:** mV and Ohms

**Minimum Span:** See Table Below

**Output:** 4 to 20mA or 20 to 4mA and HART Protocol

**Linearization:** On/Off

**Supply \*\*:** 10 to 40Vdc, Polarity Protected

**Supply Effect:** 0.001%/V

**Max. Ripple:** 10 V PP. Min. Vbat = 10Vdc

**Zero Drift:** ± 0.01%/°C or ±0.02°C/°C

**Span Drift:** ± 0.005%/°C or ±0.01°C/°C

**Long Term Drift:** ± 0.05%/Year

**Cold Junction Drift:** ± 0.01°C/°C

**Excitation Current RTD:** 0.1mA

**Sensor Lead Resistance RTD:** 500 Ohm max.

**Sensor Lead Resistance Effect:** 0.001°C/Ohm

**Sensor Lead Resistance T/C:** 10,000 Ohm max.

**Open Circuit Detection:** Upscale/Downscale Programmable

**Load Capability:** Vbat-10V/20mA

**Response Time:** <3 sec.

**Startup Time:** 20 sec.

**Warmup Time:** 5 Min.

**Ambient Operating Temp.:** -40 to +85°C.(-40 to 185°F)

**Storage Temperature:** -40 to +100°C (-40 to 212°F)

**Ingress Protection:** IP30

**Housing Material:** Makrolon

**Housing Dimension:** 0.89" x 2.92" x 3.9 (22.5 x 75 x 99mm)

Sensor Type	Temp. Min. °C	Temp. Max. °C	Span Min. °C	Temp. Min. °F	Temp. Max. °F	Span Min. °F
<b>Thermocouple Type</b>						
J (Fe-CuNi)	-200	1200	50	-328	2192	90
K (NiCr-NiAl)	-270	1370	50	-454	2498	90
T (Cu-CuNi)	-270	400	50	-454	752	90
E (NiCr-CuNi)	-270	1000	50	-454	1832	90
N (Nicrosil-NiSil)	-270	1300	50	-454	2372	90
S (Pt10%Rh-Pt)	-60	1760	250	-76	3200	450
R (Pt13%Rh-Pt)	-60	1760	250	-76	3200	450
B (Pt30%Rh-Pt6%Rh)	0	1820	600	32	3308	1080
C (W5%Re-W26%Re)	0	2300	150	32	4172	270
D (W3%Re-W25%Re)	0	2300	150	32	4172	270
U (DIN Cu-CuNi)	-200	600	50	-328	1112	90
L (DIN Fe-CuNi)	-200	900	50	-328	1652	90
<b>RTD Types</b>						
Pt100 IEC751	-200	850	25	-328	1562	45
Pt250 IEC751	-200	850	25	-328	1562	45
Pt500 IEC751	-200	850	25	-328	1562	45
Pt1000 IEC751	-200	850	25	-328	1562	45
Ni100 IEC751	-60	250	25	-76	482	45
Ni500 IEC751	-60	250	25	-76	482	45
Ni1000 IEC751	-60	250	25	-76	482	45
Cu10	-200	250	25	-328	482	45
Cu100	-200	250	25	-328	482	45
<b>Process Signals Types</b>						
mV	0	1000	10			
Ohm	0	10000	100			

The Mp88800 can be programmed in the field with the optional PC based software and IF-700 Configuration Interface, or can be supplied factory configured. For factory configuration please provide Sensor type, Minimum temperature, Maximum temperature and temperature scale.



# INFORMATION & SPECIFICATIONS DATA SHEET

TEMPERATURE & PROCESS INSTRUMENTS INC

## Mp88800 2-Wire 4 to 20mA DIN Rail Mounted Microprocessor Based Temperature Transmitter

### Intrinsically Safe Ratings

The model Mp88800 comes standard with either EX ATEX Intrinsically-Safe Approval (Ex ia IIC T5) or FM Intrinsically-Safe Approval (FM: IS/II/ABCD/T6).

ATEX parameters KEMA 03ATEX 1419 X			
Mp82700		CE 0344 Ex II 1 G EEx ia IIC T4...T6	
Maximum Ambient Temperature		Temperature Class	
+ 60 °C		T6	
+ 75 °C		T5	
+ 85 °C		T4	
* Supply circuit	KL5 and KL6	Input circuit	KL1...KL4
U <sub>i</sub> =	30 V	U <sub>o</sub> =	7.2 V
I <sub>i</sub> =	100 mA	I <sub>o</sub> =	58 mA
P <sub>i</sub> =	750 mW	P <sub>o</sub> =	103 mW
L <sub>i</sub> =	0 mH	L <sub>o</sub> =	10 mH
C <sub>i</sub> =	0 nF	C <sub>o</sub> =	13.5 µF




IF700 Programming Interface and PC Based Software

Order Information		List Price
Part Number	Description	
MP88800	DIN RAIL Microprocessor Based Universal transmitter Un-calibrated.with IS or FM Rating	\$165.00
MP88810	Microprocessor Based Universal transmitter Un-calibrated.	\$125.00
Accessories	Description	
	Factory Configuration provide Sensor Type, Min.Max Temperature and temperature Scale	\$15.00
IF700	PC Based Interface and Software for field programming	\$80.00

\* Price Subject to change without notice, please visit our web site for the latest pricing and specifications. All prices Shown in US Dollars.

### Companion Mp82800 Programmable Microprocessor Based Head Mounted Temperature Transmitter

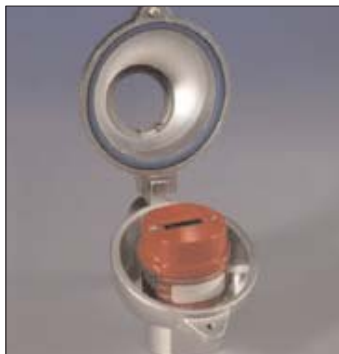

Mp82800 Shown with optional DANW connection head and 'D' display.

#### Features

- ▶ Microprocessor-Based
- ▶ Universal Input Thermocouples, RTD, millivolts and Ohms
- ▶ Field Programmable with optional Programming Kit and PC Software
- ▶ Linearized
- ▶ RFI/EMI-Immune
- ▶ High Accuracy 0.1%
- ▶ Small Size (1.7" dia. x 1.1"H)
- ▶ Optional FM or ATEX Approvals
- ▶ Optional Plug-In Display and Protection Head

Prices Start at \$100.00

Ordering is easy fast and secure just go to our web site at:

<http://www.tnp-instruments.com>

and Click on the Online Store Link, for your convenience we accept the following credit cards



Temperature & Process Instruments Inc.

Visit us on the web at [www.tnp-instruments.com](http://www.tnp-instruments.com)

1767 Central Avenue \* Suite 112 \* Yonkers \* NY \* USA \* 10710 \* Phone: (914) 673-0333 Fax: (866) 292-1456